


WICANDERS WISE

cork Pure 4mm

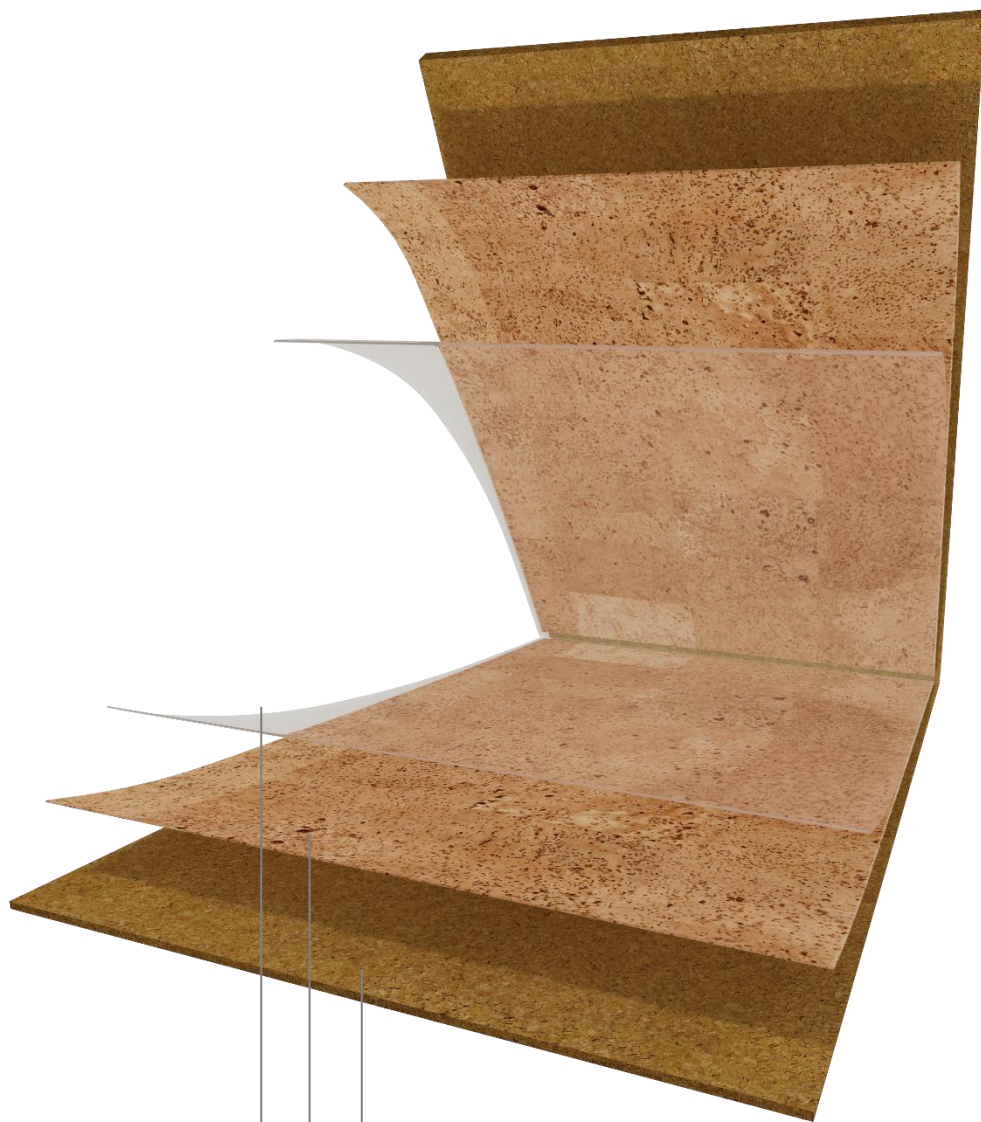

PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK

Technical Data Sheet	Standard	Unit / Requirement	Value
Dimension (LxWxT)	-	mm	300x300x4 600x150x4 600x300x4 600x450x4 600x600x4 900x300x4
Mass per unit	-	Kgs / m2	2,203
Packaging (box / pallet)	-	M2	300x300x4 - 7,92 / 237,6 600x150x4 - 7,92 / 237,6 600x300x4 - 7,92 / 237,6 600x450x4 - 8,91 / 249,48 600x600x4 - 11,52 / 276,48 900x300x4 - 10,8 / 216
Level of use Domestic	ISO10874	Class	Sanded - NA PU FINISHED - NA PU PF - NA HRT - 23
Level of use Commercial	ISO10874	Class	Sanded - NA PU FINISHED - NA PU PF - NA HRT - 33

General properties - EN 12104

Side length Squareness and Straightness of edges for side length ≤ 400 mm / > 400 mm	EN ISO 24342	deviation from nominal: $\leq 0,2\%$ up to 1,0 mm maximum deviation allowed: $\leq 0,5 / \leq 1,0$	Complies
Overall thickness mm	EN ISO 24346	$\geq 4,0$	Complies
Apparent density average - individual results	EN ISO 23997	≥ 450 kg/m ³	Complies
Dimensional stability %	EN ISO 23999	$\leq 0,25$	Complies
Curling mm	EN ISO 23999	≤ 2	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,4$	Complies
Simulated movement of a furniture leg	EN 424	No damage shall be visible after testing with type 2 foot	No visible damage

Safety properties - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	PU FINISHED - CfI-S1 HRT - CfI-S1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 12673	% mg/kg	Undetectable

Additional properties

Impact sound reduction	EN ISO 10140	dB (ΔL_w)	12
Walking noise	IHD-W431	dB %	Reduction improvement - 15,3 dB Difference of loudness 65%
Thermal resistance	EN 12667 / ISO 1957	(m ² K)/W	0,15
Stains resistance	ISO 26987 (a)	Grade	Grade 0 - Unchanged